























KEYSTONE

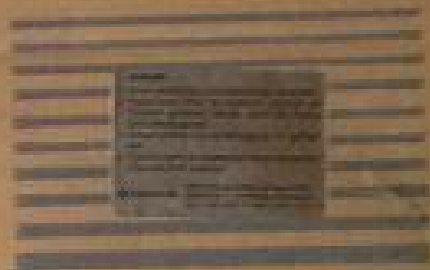


FIG. 320

NOMINAL 50 mm

VALVE SIZE (2")

TRIM NO. 116




















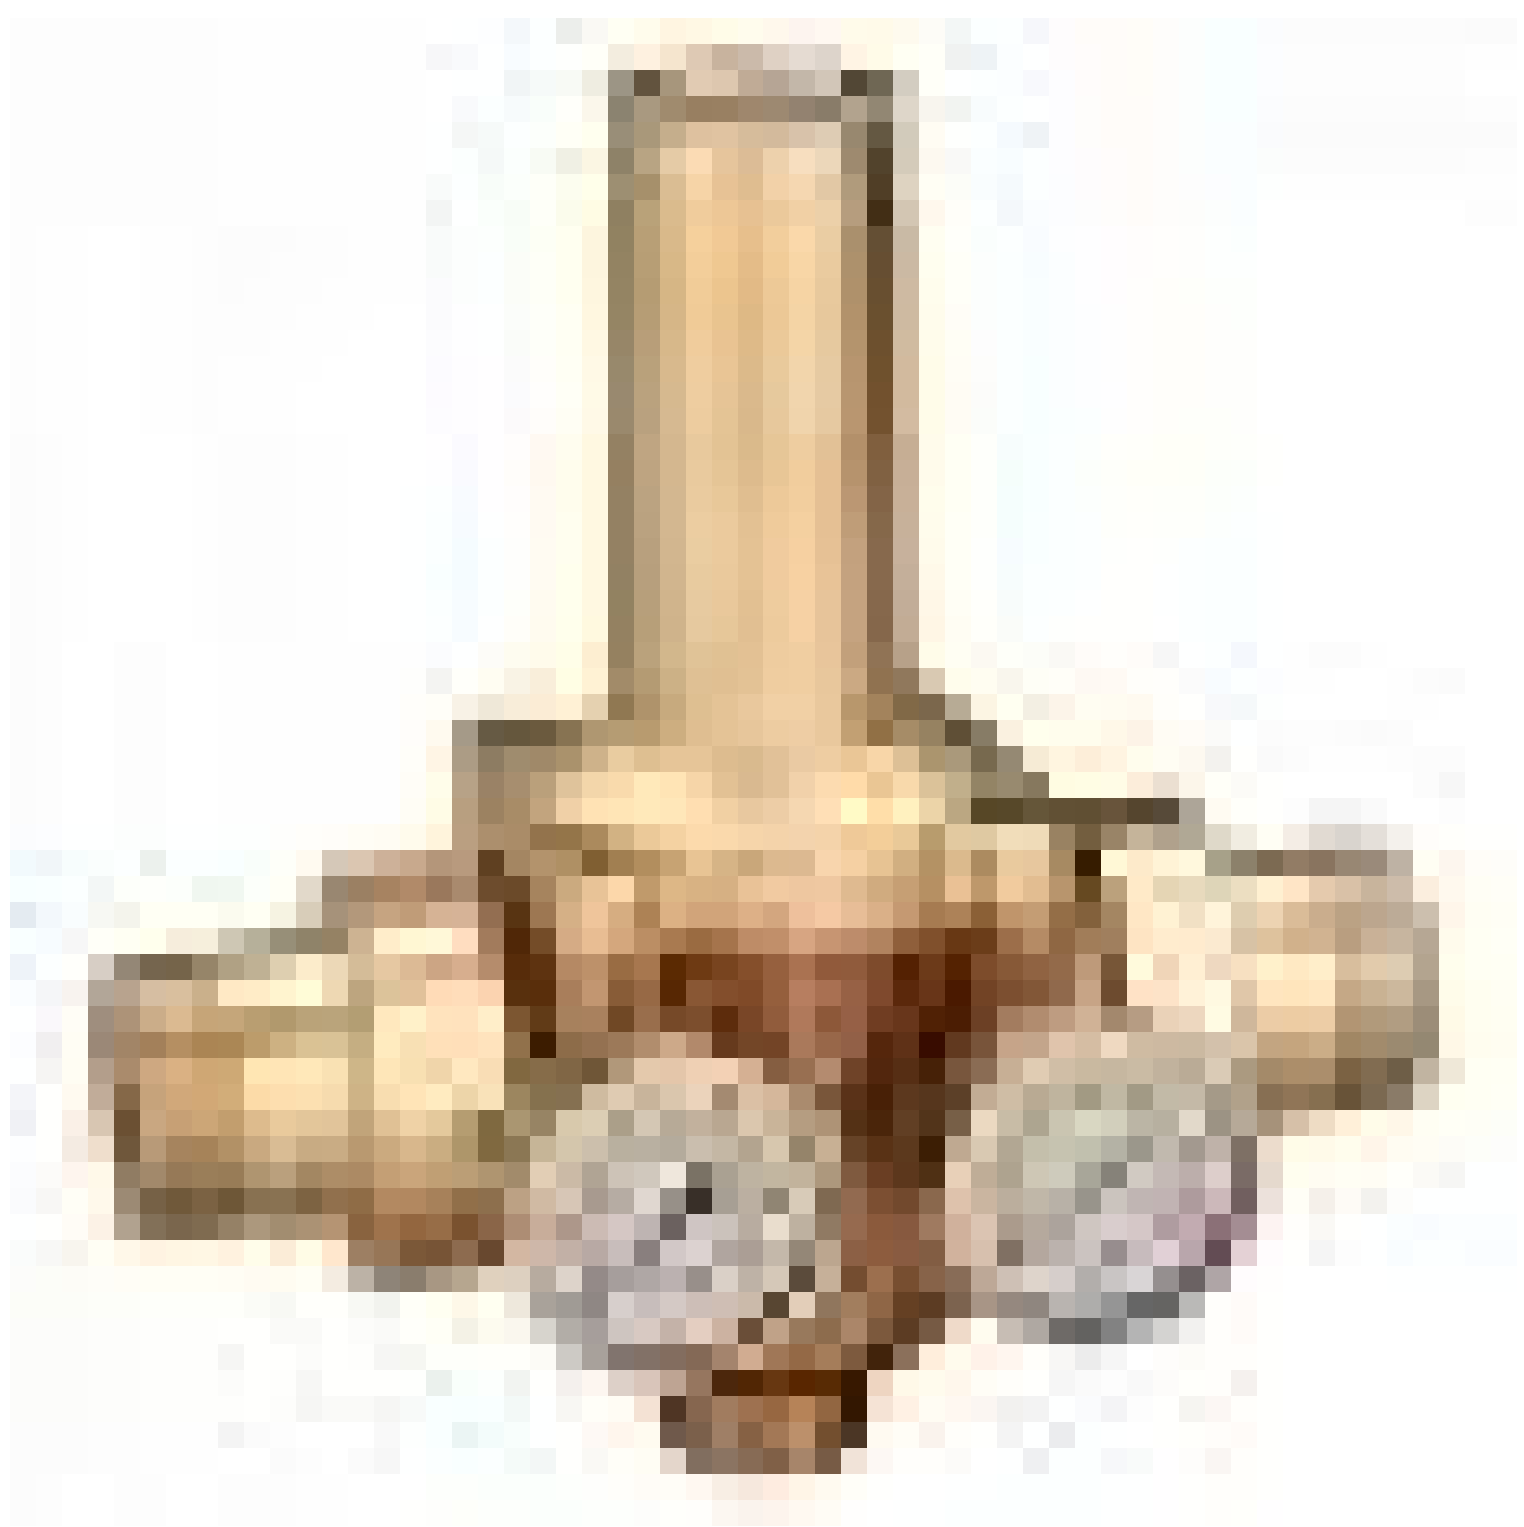









ELEMENT A-E

9M-2342

1 PC



CAT

S.O.ERRE
RC 12 13
CE



S.O.ERRE

S.O.ERRE
tecnologia dell'aria

- : AVVERTENZE GENERALI
- : PRECAUTIONS
- : INSTRUCTIONS GENERALES
- : ALLGEMEINES
- : ALGEMENE MAATREGELEN
- : INSTRUCCIONES GENERALES
- : ΟΔΗΓΙΕΣ ΧΡΗΣΕΩΣ
- : МЕРЫ ПРЕДОСТОРОЖНОСТИ
- : ÁLTALÁNOS TÁJÉKOZTATÓ
- : AVERTIZARI GENERALE
- : ŚRODKI OSTROŻNOSCI
- : VARNOSTNA OPOZORILA

احتياطات جي جي







ENTYD

ENTYD 2000-01-01
Ge. Maszyna 2000-01-01
ENTYD 2011

















ABB 1400-200-014
 1400-200-014

ABB 1400-200-014		ABB 1400-200-014		ABB 1400-200-014	
ABB 1400-200-014		ABB 1400-200-014		ABB 1400-200-014	
ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014
ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014
ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014	ABB 1400-200-014

AB

ON

OFF

O

L

U

Test

ABB 1400-200-014

CAT. NO./SERIES
1785-L20C15/F
 PLC-5/20 CONTROLNET
 PROCESSOR MODULE

REV.
E01



UL 1000
 SP 4, 5, 6
 1000V 0000
T4A

MADE IN U.S.A. 05/00
 PART NO. 96304476 AD1

SERIES FAW REV.
F A.1

BACKPLANE REQUIREMENTS
 3.0 AMPS AT 5VDC
 NOT INCLUDING MEMORY CARTRIDGE


SN 000803EA



WST1FF5LJW

UP
 DOWN

S1-CH1A DH+ ADDRESS

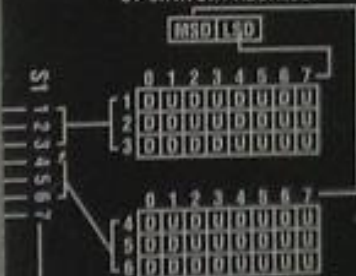

RIO/DH+ PORT PINOUT		
1	COMMON	2
DH+	CLN SHIELD BLUE	
RIO	BLUE SHIELD CLN	

CHB PORT PINOUT

RIO-232C-1			RS-422			RS-423		
1	C GND		C GND			C GND		
2	TXD OUT		TXD OUT			TXD OUT		
3	RXD IN		RXD IN			RXD IN		
4	RYS OUT		RYS OUT			RYS OUT		
5	CLS IN		CLS IN			CLS IN		
6	DSM IN		DSM IN			DSM IN		
7	SHL GND		SHL GND			SHL GND		
8	DCD IN		DCD IN			DCD IN		
9	RESERVED		RESERVED			RESERVED		
10	-		DCD IN			-		
11	RESERVED		RESERVED			RESERVED		
12	RESERVED		RESERVED			RESERVED		
13	-		CLS IN			-		
14	-		TXD OUT			TXD OUT		
15	RESERVED		RESERVED			RESERVED		
16	-		RXD IN			RXD IN		
17	RESERVED		RESERVED			RESERVED		
18	RESERVED		RESERVED			RESERVED		
19	-		RYS OUT			-		
20	TXA IN		TXA OUT			TXA OUT		
21	RESERVED		RESERVED			RESERVED		
22	-		DSM IN			-		
23	-		DCD OUT			-		
24	RESERVED		RESERVED			RESERVED		
25	RESERVED		RESERVED			RESERVED		

S2-CHB PORT CONFIGURATION

1			2			3		
RS-232C	0	0	0	0	0	0	0	0
RS-422	0	0	0	0	0	0	0	0
RS-423	0	0	0	0	0	0	0	0







BASE: YBN-R3

1: HALL LINE IN, 2: HALL LINE OUT




3: GND, 4: HALL REMOTE LED

5: HALL COMMON IN

6: HALL COMMON OUT

NOTHING CAN BE USED IN THE



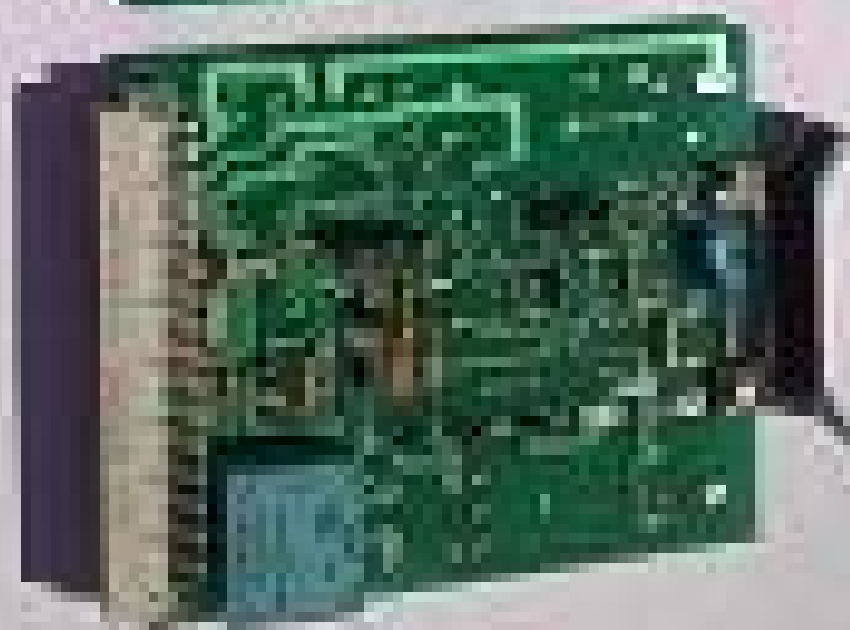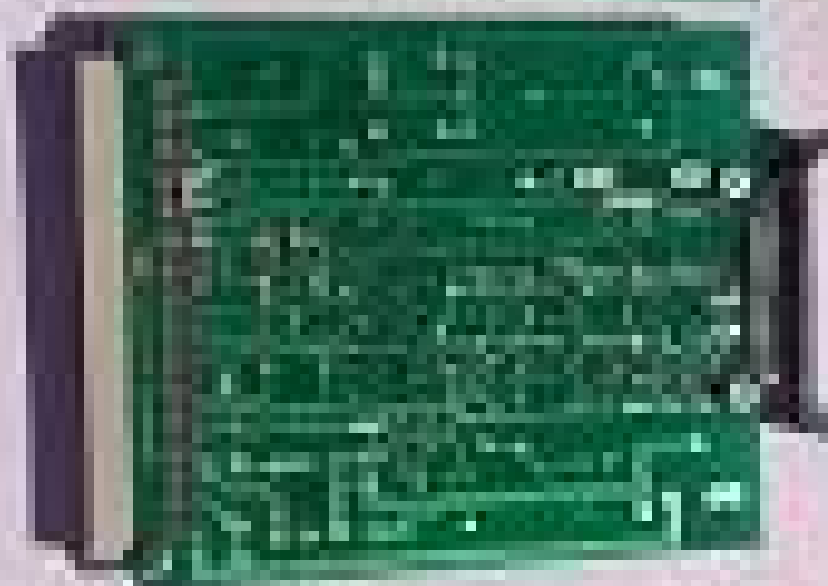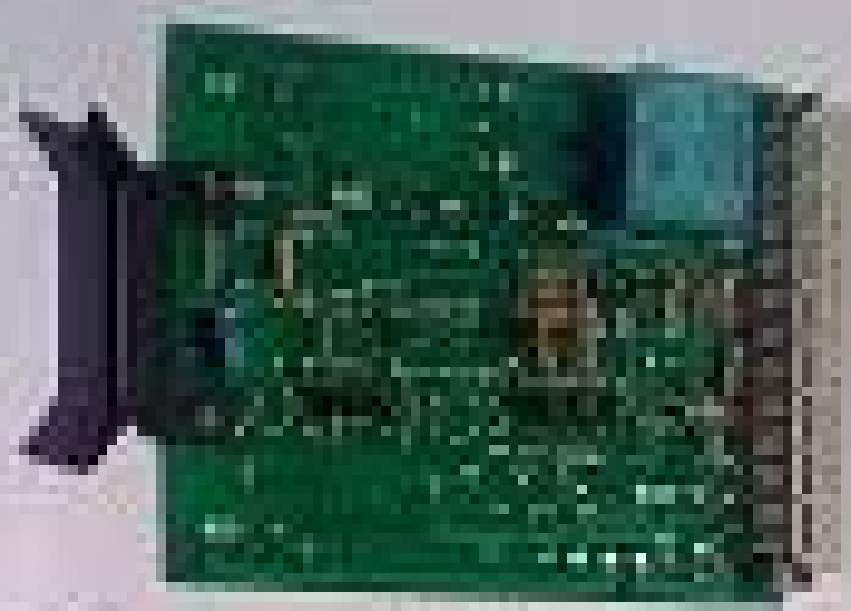



MOLEX
power supply

Ⓢ Type 9527

230V AC 50-60Hz 1.2A

CE

48V DC
Max 2.5A

















Qty 5
(Q)

Batch no.
48253693







EAST
DSV
CZ-878720
LAACE-84720
CZ LAA

FROM NOO TO EAST
10051620-3
10-02-18
20012214-05

ABB

EAST











ABB

31364
42kg

ABB
31364
42kg

ABB
31364
42kg

ABB
31364
42kg





